Beverage Center

PRODUCT MODEL NUMBER

MBCM24FW

Electrical: 115-Volt, 60-Hz, AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your beverage center be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning or removing a light bulb, unplug beverage center or disconnect power.

LOCATION REQUIREMENTS

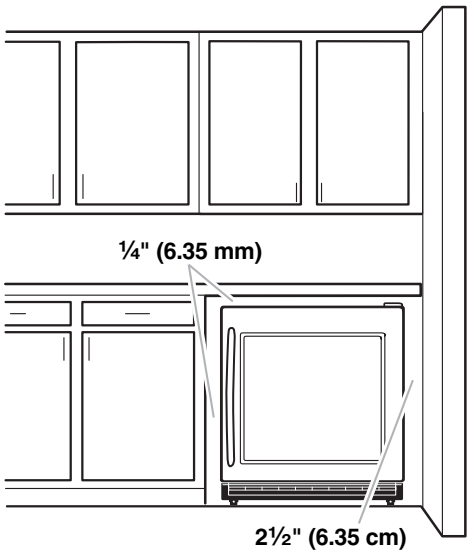

To ensure proper ventilation for your beverage center, allow for a ¼" (6.35 mm) space on each side and at the top. When installing your beverage center next to a fixed wall, leave 2½" (6.35 cm) minimum clearance on each side to allow for the door to swing open.

NOTE: It is recommended that you do not install the beverage center near an oven, radiator, or other heat source. Do not install in a location where the temperature will fall below 55°F (13°C). for best performance, do not install the beverage center behind a cabinet door or block the base grille.

OVERALL DIMENSIONS

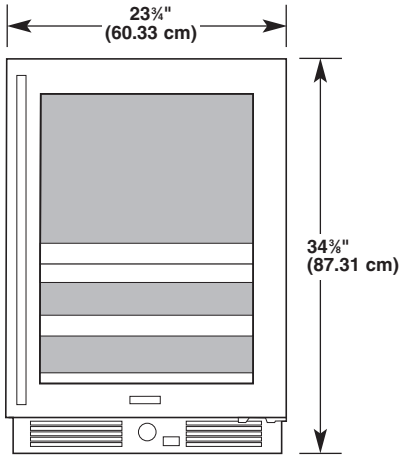

Height to top of cabinet:	*34⅜" (87.31 cm)*
Height to top of door hinge:	*34⅜" - 35⅛" (87.31 cm - 89.22 cm)*
Width closed:	*23¾" (60.33 cm)*
Depth closed including handle:	*26⅞" (68.26 cm)*
Depth closed excluding handle:	*24⅜" (61.91 cm)*
Depth excluding doors:	*22" (55.88 cm)*
Depth with doors open 90˚:	*47" (119.38 cm)*

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10285880A
3/14/11